

BLK0042

LED WARNING LIGHTBAR 1223MM R10 R65

WARNINGS FOR THE USER:

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations
- Only mount the lamp to a flat, metal, dry, cleaned and degreased roof surface. The maximum speed of movement of the vehicle with a warning lamp attached with a magnet to the roof surface is 50km/h. Take special care in windy conditions. Do not unscrew the lamp, it will lose its water resistance.






www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:



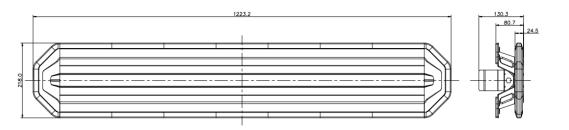



TECHNICAL SPECIFICATIONS:









MATI	RIAL	LED/LM Quantity	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Ho	ns: PC using: inium	» 204 LED	» screws	» 3500mm	» 4 warning flashes » two level of intensity day and night » control box	» 106W	» 12/24V	» ECE R10 » ECE R65	» cart. dim.: 1575x275x90mm » weight: 7000g » 1 pc/bulk box