



REFERENCE: BLK0026-2

LED WARNING LIGHTBAR

1198X200 R65 TA2

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- Use in open space only.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations
- Only mount the lamp to a flat, metal, dry, cleaned and degreased roof surface. The maximum speed of movement of the vehicle with a warning lamp attached with a magnet to the roof surface is 50km/h. Take special care in windy conditions. Do not unscrew the lamp, it will lose its water resistance.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

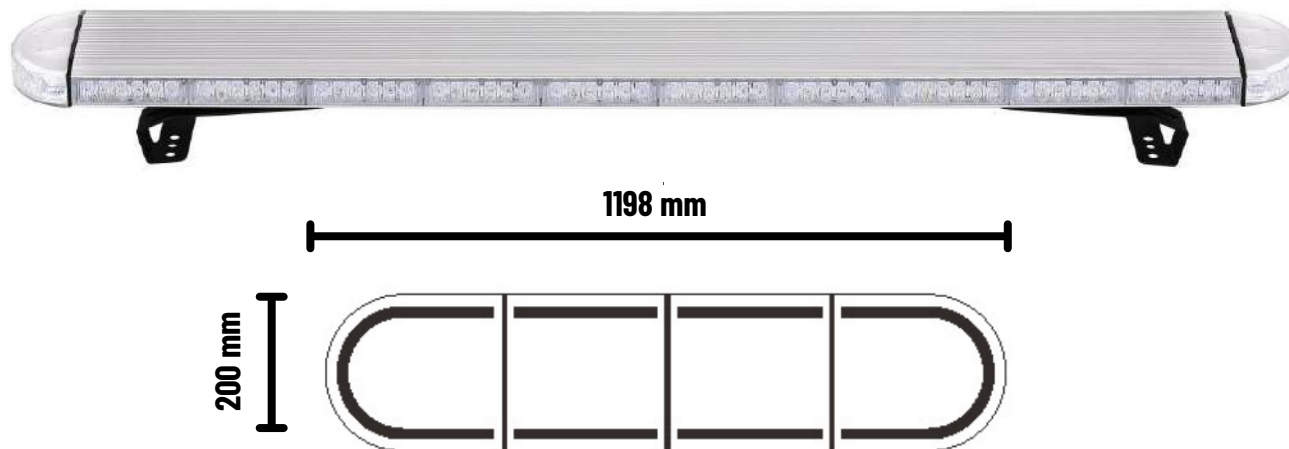

TECHNICAL SPECIFICATIONS:



| MATERIAL | LED/LM QUANTITY | MOUNTING | WIRE | FUNCTION | WATT | VOLTAGE | CERTIFICATES | PACKING/WEIGHT |
|-----------------------------|-----------------|----------|---|---|--------|------------|------------------------|---|
| » Lens: PC » Housing: AL | » 264 LED | » screws | » power wire is 3.5m » wire for controller is 1.5m | » 6 warning flashes » two level of intensity day and night | » 103W | » 12 V/24V | » ECE R10 » ECE R65 | » cart. dim.: 1300x280x140mm » weight: 8500g » 1 pcs/bulk box |

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.